

GENERAL DESCRIPTION

SE87XX series is designed for power-sensitive applications. It includes a precision and high voltage input stage, an ultra-low-power bias current branch, and results in a ultra-low-power and low-dropout linear regulator.

The SE87XX operates from an input voltage of $V_{OUT}+1V$ to 40V, consumes only $2.6\mu A$ of quiescent current, and offers 1% initial accuracy and SoftStart function. At power startup, the output voltage overshoot is less than 100mV.

The SE87XX regulators is available in standard SOT89-3L and SOT23-3L packages. Standard products are Pb-free and Halogen-free.


FEATURES

- Input voltage: 4.5V~40V
- Output voltage: 1.8V~5.7V
- Output accuracy: $<\pm 1\%$
- Output current: 100mA (Typ.)
- PSRR: 60dB @ 100Hz
- Quiescent current: $4.2\mu A$ @ $V_{IN} = 12V$ (Typ.)
- ESD HBM: 3KV
- Recommend capacitor: $10\mu F$
- No overshoot from short circuit recovery
- UVLO at 1.8V

APPLICATIONS

- Battery-powered Smoke sensor
- Smoke sensor
- Microcontrollers
- Household appliances and instruments


TYPICAL APPLICATION CIRCUIT

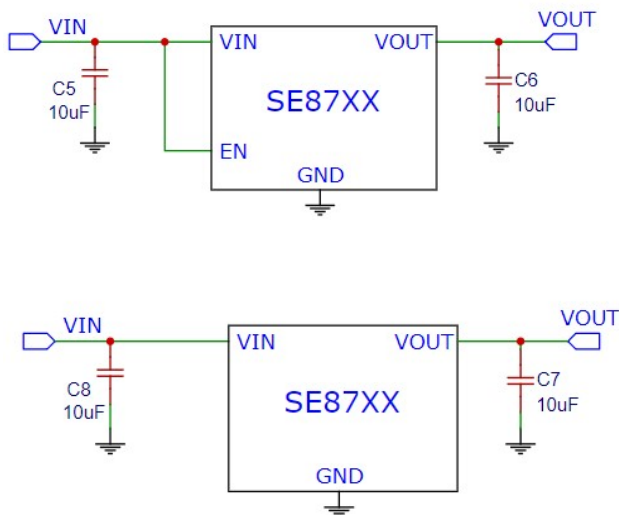

In plugging in application, C_{IN} is recommended to use 10uF electrolytic capacitor or 10uF MLCC with 2 ohm serial resistors to prevent large input voltage spike when plugging in. See APPLICATION INFORMATION for more information.

PIN CONFIGURATION


(Customer pin assignments are available)

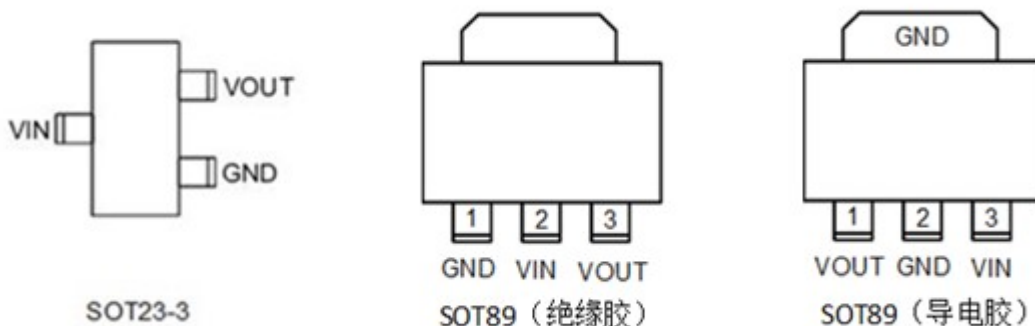

PIN DESCRIPTION

| SYMBOL | I/O | DESCRIPTION |
|--------|--------|-------------|
| GND | Ground | Ground |
| VIN | Power | Input |
| VOUT | O | Output |

ORDERING INFORMATION

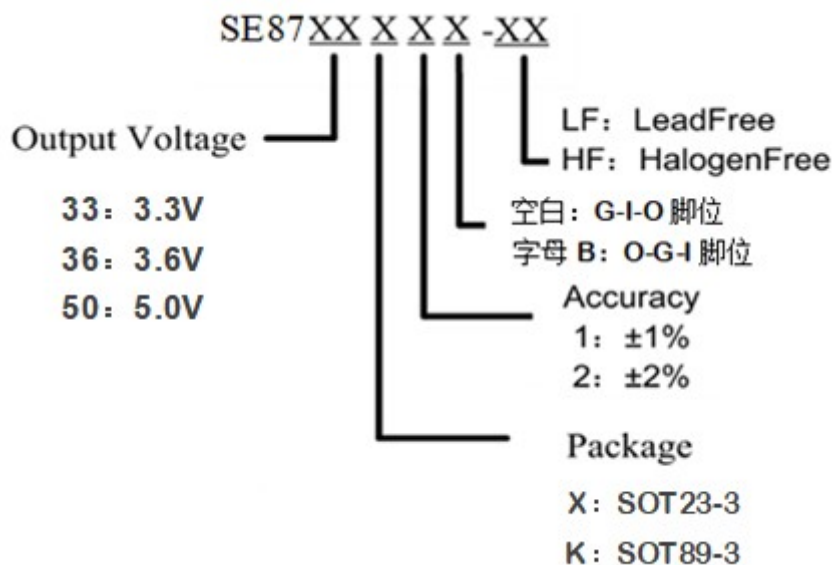


ABSOLUTE MAXIMUM RATINGS (Note)

| SYMBOL | ITEMS | VALUE | UNIT |
|---------------|--|-------------|------|
| V_{IN} | Input Voltage | -0.3~40 | V |
| V_{OUT} | Output Voltage | -0.3~6.5 | V |
| P_{DMAX} | Power Dissipation | OTP limited | W |
| T_J | Junction Temperature | -40~150 | °C |
| T_{stg} | Storage Temperature | -55 to 150 | °C |
| T_{solder} | Package Lead Soldering Temperature (10s) | 260 | °C |
| ESD MM | Machine Mode | 200 | V |
| ESD HBM | Human Body Mode | 3000 | V |
| θ_{JA} | Thermal Resistance, Junction-to-Ambient | 165 (SOT89) | °C/W |
| | | 280 (SOT23) | |
| P_D | Power Consumption | 750 (SOT89) | mW |
| | | 250 (SOT23) | |

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED OPERATING RANGE

| SYMBOL | ITEMS | VALUE | UNIT |
|-----------------|---------------------------|-------------|------|
| V_{IN} | V_{IN} Supply Voltage | 4.5 to 40 | V |
| $R_{\theta JA}$ | Thermal Resistance on PCB | 45 | °C/W |
| T_{OPT} | Operating Temperature | -40 to +105 | °C |

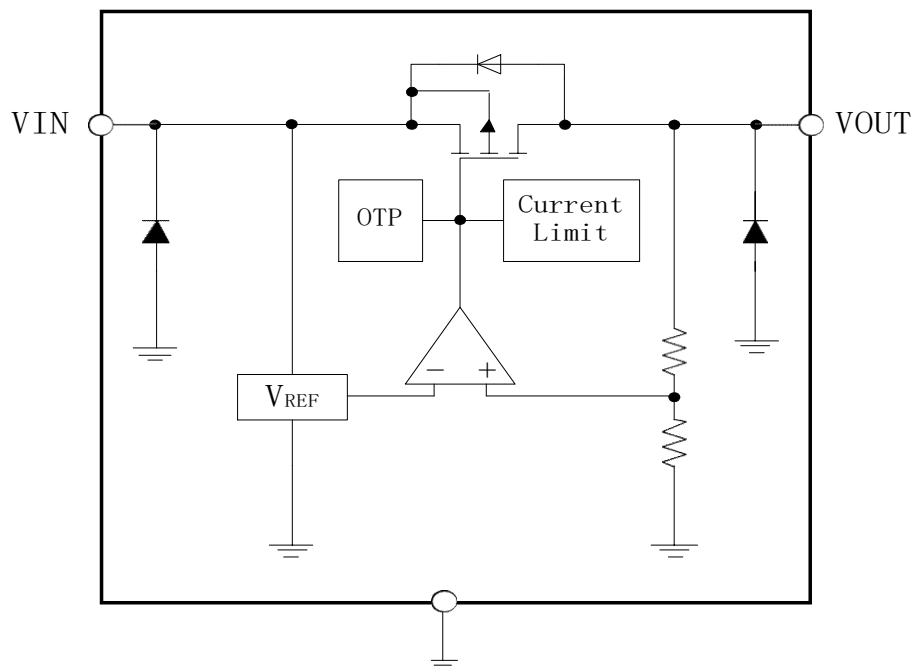SIMPLIFIED BLOCK DIAGRAM


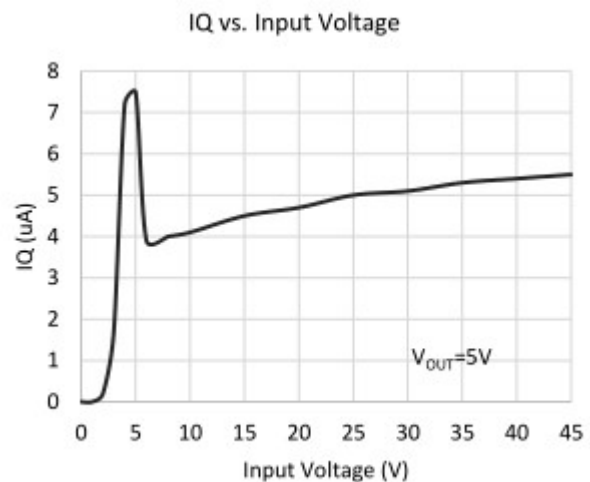
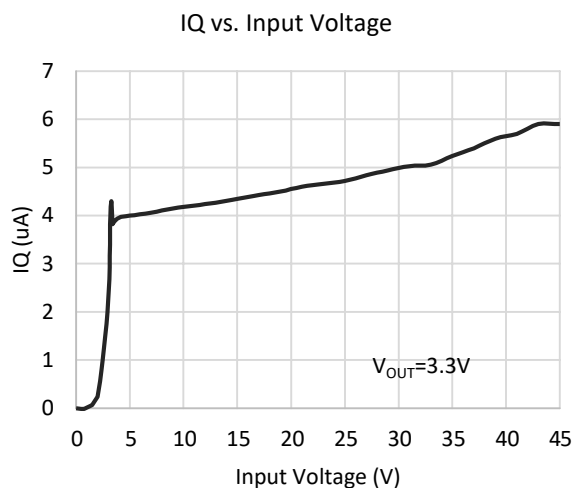
ELECTRICAL CHARACTERISTICS







($V_{IN}=12V$; $T_j=25^{\circ}C$ unless otherwise noted.)


| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------|---|---|-----|-----------|-----|------------------|
| V_{IN} | Input Supply Voltage | | 4.5 | | 40 | V |
| V_{OUT} | Output Voltage Accuracy | $I_{OUT}=10mA$ | -1% | | 1% | V |
| | | | -2% | | 2% | V |
| I_Q | Quiescent Current | | | 4.5 | 8 | μA |
| I_{OUT} | Output Current | | 150 | 200 | | mA |
| V_{DROP} | Dropout Voltage | $I_{OUT}=10mA$ $\Delta V_{OUT} = -V_{OUT} * 2\%$ | | 60 | | mV |
| | | $I_{OUT}=100mA$ $\Delta V_{OUT} = -V_{OUT} * 2\%$ | | 600 | | mV |
| | | | | | | |
| V_{LR} | Load Regulation | $1mA \leq I_{OUT} \leq 100mA$ | | 20 | | mV |
| V_{SR} | Line Regulation | $I_{OUT}=1mA$, $V_{IN}=(V_{OUT}+4V)$ to 40V | | 0.08 | | %/V |
| PSRR | Power Supply Rejection Ratio ($V_{in}=10V$, $V_{pp}=0.5V$, $I_{out}=1mA$) | Freq=100Hz | | 60 | | dB |
| | | Freq=1KHz | | 50 | | dB |
| | | Freq=10KHz | | 40 | | dB |
| I_{LIMIT} | Current Limit | $V_{IN}=(V_{OUT}+1V)$ to 30V $R_{LOAD}=V_{OUT}/1A$ | | 350 | | mA |
| T_{SHDN} | Thermal Protection | | | 165 | | $^{\circ}C$ |
| TC_{VOUT} | Output Voltage Temperature Coefficient | $I_{OUT}=10mA$ $-40^{\circ}C \leq T_{AMB} \leq 100^{\circ}C$ | | ± 100 | | ppm/ $^{\circ}C$ |

TYPICAL PERFORMANCE CHARACTERISTICS

$C_{IN} = 10\mu F$, $C_{OUT} = 10\mu F$, $T_{OPT} = 25^{\circ}C$, unless specified otherwise. (SE87XXK2B Package)



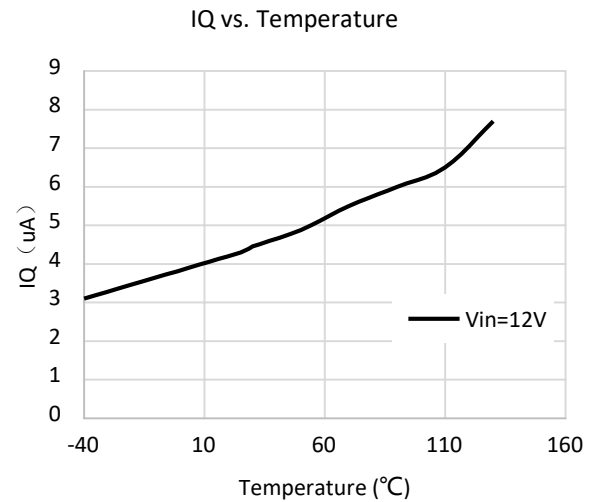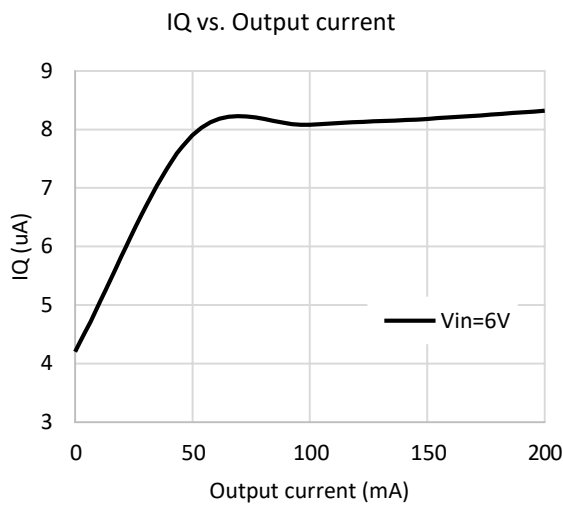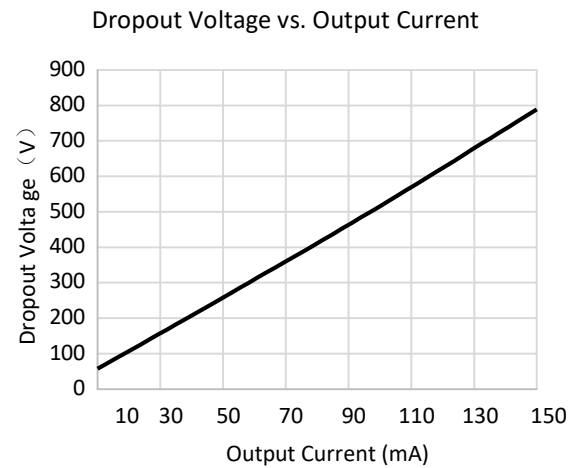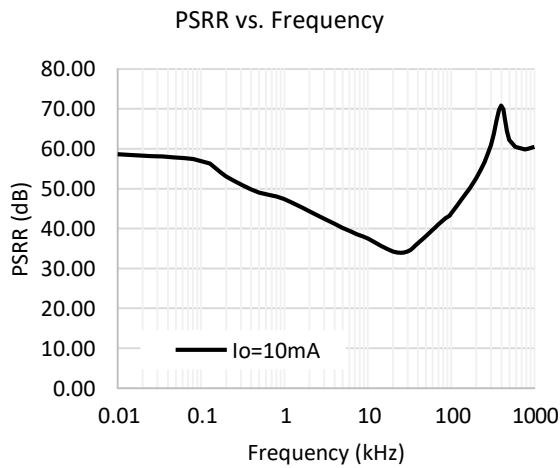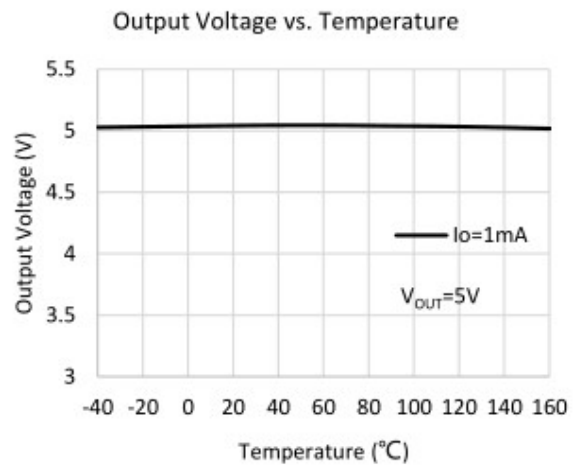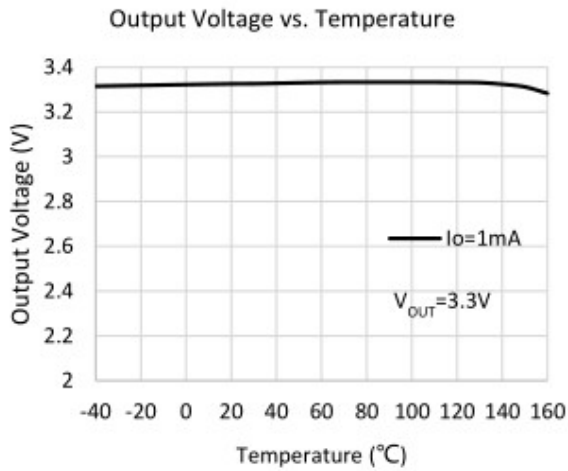

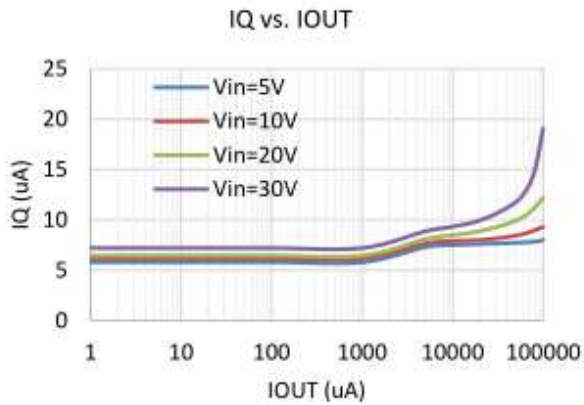

Power ON/OFF


CH1 : V_{IN}

CH2 : V_{OUT}

$V_{IN}=40V$

$I_{OUT}=1mA$

$V_{OUT}=5V$

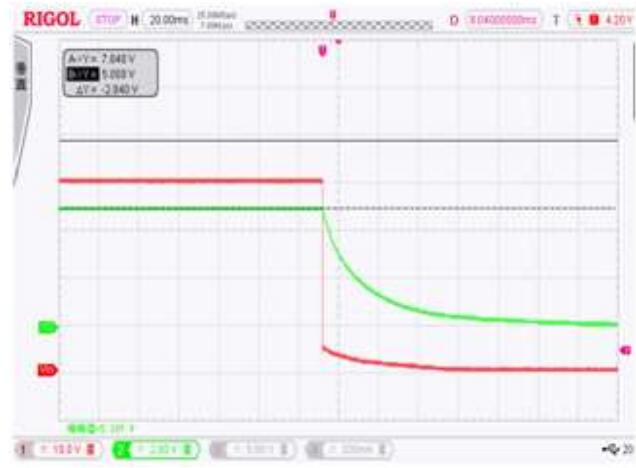

Line Transient

CH1: V_{IN}

CH2 : V_{OUT}

$V_{IN}=6V-12V$

$I_{OUT}=1mA$

$V_{OUT}=5V$



$V_{IN}=6V-12V$

$I_{OUT}=10mA$

$V_{OUT}=5V$



APPLICATION INFORMATION

INPUT CAPACITOR

An input capacitor of 10 μ F is required between the VIN and GND pin. The capacitor shall be placed as close as possible to VIN pin, and the use of electrolytic capacitors is recommended.

OUTPUT CAPACITOR


The recommended is 10 μ F MLCC capacitor. The minimum capacitance for stable and correct operation is 1 μ F.

NO-LOAD STABILITY

The SE87XX will remain stable and in regulation with no external load. This is especially important in CMOS RAM keep-alive applications.

TYPICAL CIRCUIT


The following figure shows a typical application circuit for the SE87XX devices. Please keep in mind that in-rush current can push up the Vin overshoot by as much as 50%. For example, when Vin=30V, the in-rush caused spike voltage can be as high as 40V. Therefore the voltage rating of Cin needs to be higher than 50% of the application.

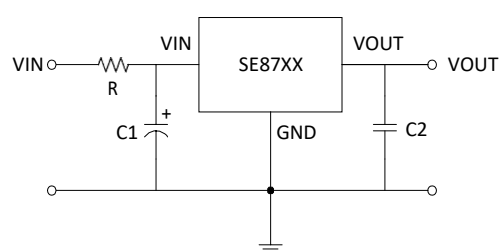


In live insertion application, it is suggested that R, C1 are selected as following:

1. C1=10 μ F ~ 100 μ F electrolytic capacitor with maximum voltage greater than 50V, R=0
2. If the average current is known, for example at 10mA, then for an input voltage of 20V, the C1=1 μ F ~ 10 μ F ceramic or electrolytic with maximum voltage greater than 40V and R=1K Ω in the type of 1206 at 1/4W rating can be selected.

PACKAGE OUTLINE
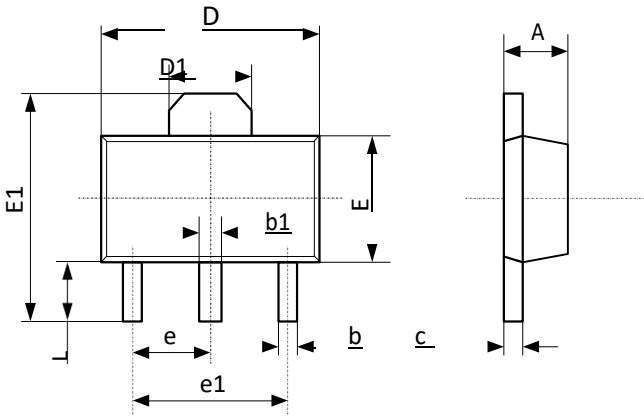
| Package | SOT89-3L | Devices per reel | 1000Pcs | Unit | mm |
|--|---------------------------|------------------|----------------------|-------|----|
| Package Dimension: | | | | | |
|  | | | | | |
| Symbol | Dimensions In Millimeters | | Dimensions In Inches | | |
| | Min | Max | Min | Max | |
| A | 1.400 | 1.600 | 0.055 | 0.063 | |
| b | 0.320 | 0.520 | 0.013 | 0.020 | |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 | |
| c | 0.350 | 0.440 | 0.014 | 0.017 | |
| D | 4.400 | 4.600 | 0.173 | 0.181 | |
| D1 | 1.45 | 1.65 | 0.057 | 0.065 | |
| E | 2.300 | 2.600 | 0.091 | 0.102 | |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 | |
| e | 1.500 TYP | | 0.060 TYP | | |
| e1 | 3.000 TYP | | 0.118 TYP | | |
| L | 0.900 | 1.200 | 0.035 | 0.047 | |

PACKAGE OUTLINE
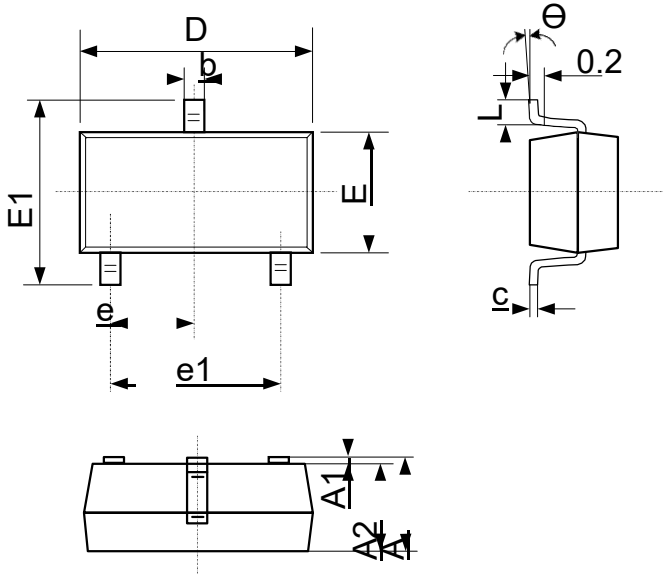
| Package | SOT23-3L | Devices per reel | 3000Pcs | Unit | mm |
|--|---------------------------|------------------|----------------------|-------|----|
| Package Dimension: | | | | | |
|  | | | | | |
| Symbol | Dimensions In Millimeters | | Dimensions In Inches | | |
| | Min | Max | Min | Max | |
| A | 1.050 | 1.250 | 0.041 | 0.049 | |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 | |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 | |
| b | 0.300 | 0.500 | 0.012 | 0.020 | |
| c | 0.100 | 0.200 | 0.004 | 0.008 | |
| D | 2.820 | 3.020 | 0.111 | 0.119 | |
| E | 1.500 | 1.700 | 0.059 | 0.067 | |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 | |
| e | 0.950(BSC) | | 0.037(BSC) | | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 | |
| L | 0.300 | 0.600 | 0.012 | 0.024 | |
| θ | 0° | 8° | 0° | 8° | |

Customer SupportSeaward Electronics Incorporated – China

Section B, 2nd Floor, ShangDi Scientific Office Complex, #22 XinXi Road

Haidian District, Beijing 100085, China

Tel: 86-10-8289-5700/01/05

Fax: 86-10-8289-5706

Email: sales@seawardinc.com.cn

Seaward Electronics Incorporated – North America

1512 Centre Pointe Dr.

Milpitas, CA95035, USA

Tel: 1-650-444-0713